


AQUAFIDES

Technical Data Sheet Low Pressure Lamp

AQUAFIDES AF 22

W00022

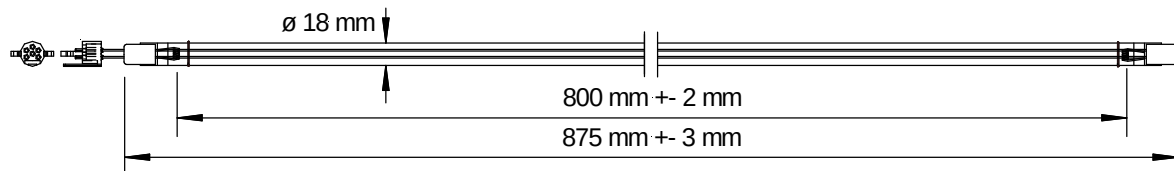

Electrical Data:

Electrical power:	80 W $\pm 10 \%$
Lamp voltage:	115 V $\pm 10 \%$
Lamp current:	0,8 A $\pm 5 \%$


Spectral Data (100 h):

UVC radiation flux (185 nm):	0 W
UVC radiation flux (254 nm):	25 W
Ozone / Ozone Free:	ozone free

Operation Conditions:

Ballast:	electronic ballast
Burning position:	preferably horizontal
Cooling - water plant:	water temp. 5 - 30 °
Cooling air:	convection

Spectral Output:

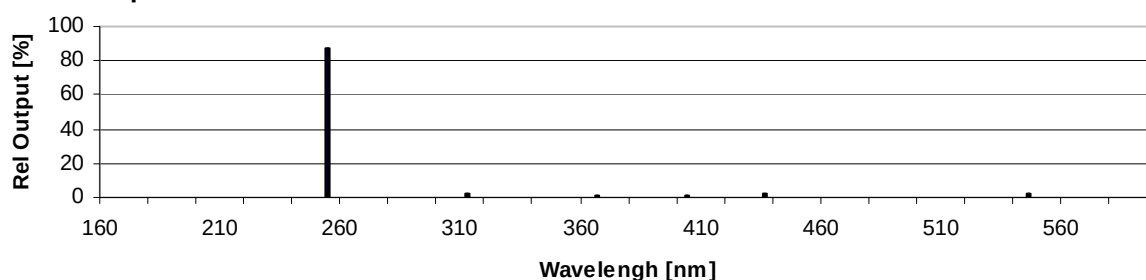

Economic Lifetime:

Expected useful lifetime:	8760
Intensity decrease:	20%
Max. switches / 24 h:	4

Notice:

All technical data are nominal values. Variations up to 10 % are possible.

We reserve the right to make technical changes at any time without notice.

All electrical and emission data are based on average data and have been measured under laboratory terms.